




Minimální sklon 5 °

Doporučené maximální konstrukční parametry rozměru A

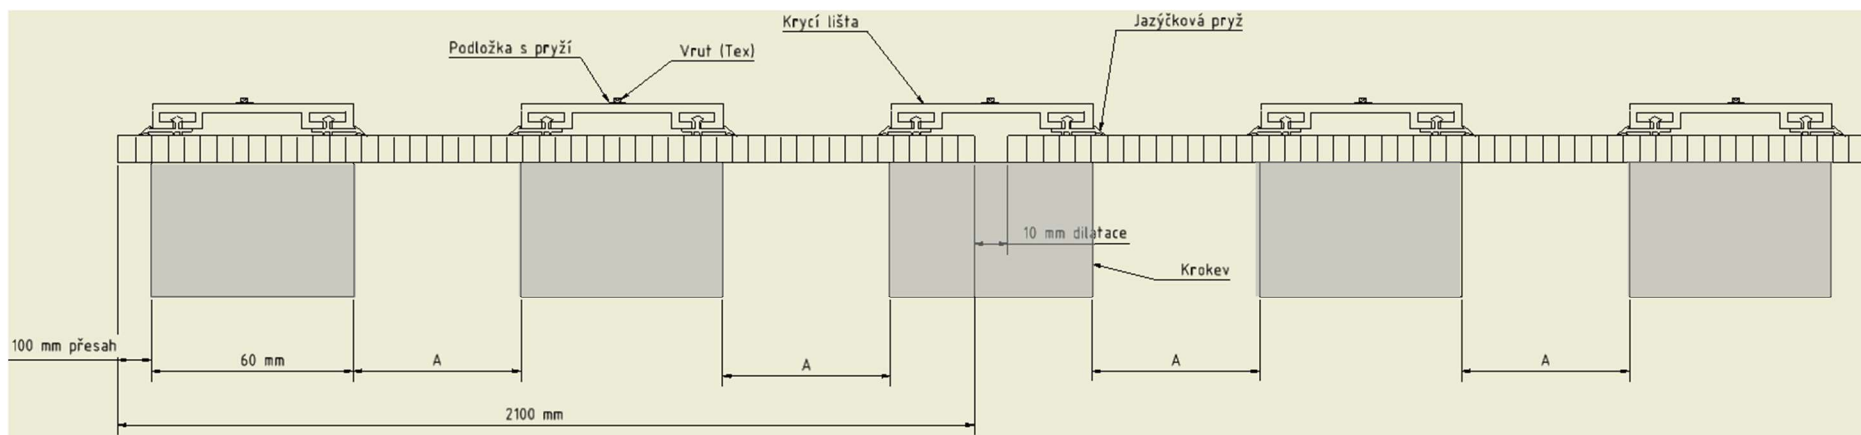

Tloušťka desky (mm)	Zatížení (N/m²)					
	600	800	1000	1200	1400	1600
MULTICLEAR BOX						
Rozměr A (mm)						
8	680	610	545	500		
10	770	710	660	620	585	550
MULTICLEAR STRONG						
10	760	650	570	520		
16	1100	1025	960	900	875	830
20	1300	1100	980	890	820	750
25	1300	1300	1150	1050	975	900

Rozměr A můžete zvětšit pomocí podélných latí, které zařezáte do krokev v rozteči B= 1200 mm.



Tloušťka desky (mm)	Zatížení (N/m²)					
	600	800	1000	1200	1400	1600
MULTICLEAR BOX						
Rozměr A (mm)						
8	980	910	845	800		
10	1070	1010	960	920	885	850
MULTICLEAR STRONG						
10	1060	950	870	820		
16	1400	1325	1260	1200	1175	1030
20	1600	1400	1280	1190	1120	1050
25	1600	1600	1450	1350	1275	1200